



In addition to a wide range of flat spray standard tips, with and without preorifice, we also produce **high-quality** reversible Airless tips.

The product range is based on the **spraying parameters of well-known brands.**




Crucial advantages:


- ✓ Interchangeable alternative to all well-known brands
- ✓ Tungsten carbide tip insert for long lifetime
- ✓ Stainless steel housing
- ✓ Made in Germany
- ✓ Highest availability – fastest delivery
- ✓ Customised production for private label



Your authorized dealer:

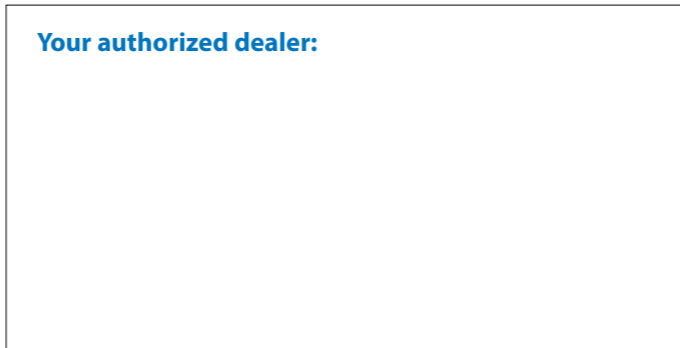

AIRLESS UNIVERSAL TIPS

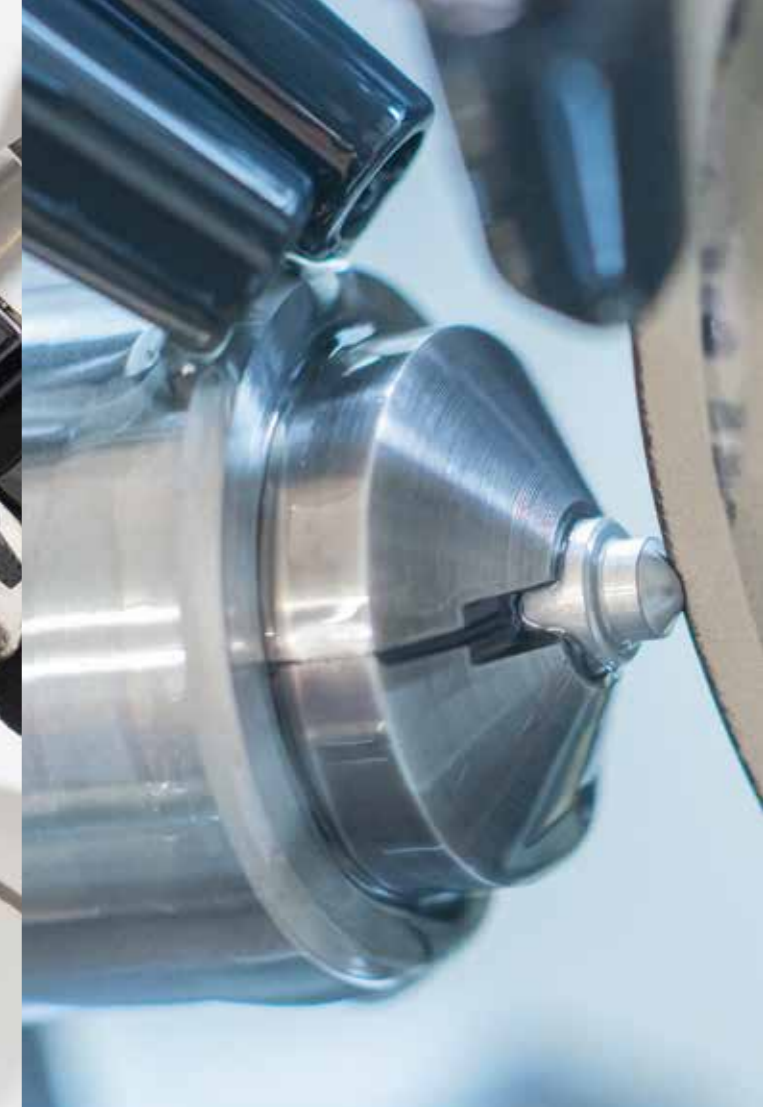

We manufacture spray tips for surface technology on our **fully automatic CNC machines** with a production capacity of currently **500,000 tips per year.**

Our focus is on the development and production of AirCombi and Airless paint spray tips up to **500 bar**, made from robust and resistant **hard metal** (tungsten carbide).



Matches the flow rate and spray angle parameters of the average of well-known manufacturer models.

Standard	max. 280 bar	MT-U-xxx
Fine Finish	max. 280 bar	MT-U-xxx-FF
Low Pressure	max. 280 bar	MT-U-xxx-LP
Heavy Duty	max. 500 bar	MT-U-xxx-HD

Matches the flow rate and spray angle parameters of Graco RacV reversible tips.

Standard	max. 280 bar	MT-U-GR-xxx
Fine Finish	max. 280 bar	MT-U-GR-xxx-FF
Low Pressure	max. 280 bar	MT-U-GR-xxx-LP
Heavy Duty	max. 500 bar	MT-U-GR-xxx-HD

Matches the flow rate and spray angle parameters of Wagner TradeTip reversible tips.

Standard	max. 280 bar	MT-U-W-xxx
Fine Finish	max. 280 bar	MT-U-W-xxx-FF
Low Pressure	max. 280 bar	MT-U-W-xxx-LP
Heavy Duty	max. 500 bar	MT-U-W-xxx-HD

Matches the flow rate and spray angle parameters of Titan SC-6 reversible tips.

Standard	max. 280 bar	MT-U-TI-xxx
Fine Finish	max. 280 bar	MT-U-TI-xxx-FF
Low Pressure	max. 280 bar	MT-U-TI-xxx-LP
Heavy Duty	max. 500 bar	MT-U-TI-xxx-HD